(AZ) (BZ (O)) (O))	OKLAHOMA CORPORATION COMMISSION OIL & GAS CONSERVATION DIVISION P.O. BOX 52000 OKLAHOMA CITY, OK 73152-2000 (Rule 165:10-3-1) PERMIT TO DRILL County: KINGFISHER MOLIARTER: FROM SOUTH FROM WEST	Approval Date: 07/29/2016 Expiration Date: 01/29/2017		
SECTION Lease Name: BULLIS 170	Well No: 1A-10MH Well will	be 357 feet from nearest unit or lease boundary.		
Operator OKLAHOMALENERGY ACQUISITIONS LP Name:	Telephone: 2815300991	OTC/OCC Number: 23509 0		
OKLAHOMA ENERGY ACQUISITIONS LP 15021 KATY FWY STE 400 HOUSTON, TX 77094	AUDIE & BRENDA PO BOX 215 DOVER	PPICE OK 73734		
Formation(s) (Permit Valid for Listed Formations Name 1 MISSISSIPPI 2 3 4 5	s strily): Depts Name 6973 6 8 9 10	Depth		
Spacing Orders: 604524	Location Exception orders 653591	Increased Density Orders: 653519		
Pending CD Numbers: 201601584		Special Orders:		
Total Depth: 12636 Ground Elevation: 1092	Surface Casing: 500	pth to base of Treatable Water-Bearing FM: 40		
Under Federal Jurisdiction: No	Fresh Water Supply Well Drilled: No	Surface Water used to Drill: No		
PIT 1 INFORMATION Type of Pit System: CLOSED Closed System Medius Steel Pits Type of Mud System: WATER BASED Chlorides Max: 4000 Average: 2500 Is depth to top of ground water greater than 10ft below base of pit?	Approved Method for disposal of D D. One time land application — (R H. CLOSED SYSTEM=STREL PI	EQUIRES PERMIT) PERMIT NO: 16-31471		
Within 1 mile of municipal water well? Wellhead Protection Area? Pit is located in a Hydropoically Sensitive Area.	eled per tor request 2016 SPV			

HORIZONTAL HOLE 1

Sec 10 Twp 17N Rge 6W County KINGFISHER

Spot Location of End Point: SE SW SW SW Feet From: SOUTH 1/4 Section Line: 200

Feet From: WEST 1/4 Section Line: 355

Depth of Deviation: 7032
Radius of Turn: 472
Direction: 182
Total Length: 4862

Measured Total Depth: 12636

True Vertical Depth: 7496

End Point Location from Lease,
Unit, or Property Line: 200

Notes:

Category Description

DEEP SURFACE CASING 7/29/2016 - G71 - APPROVED; NOTIFY OCC FIELD INSPECTOR IMMEDIATELY OF ANY LOSS OF

CIRCULATION OR FAILURE TO CIRCULATE CEMENT TO SURFACE ON ANY CONDUCTOR OR

SURFACE CASING

HYDRAULIC FRACTURING 7/29/2016 - G71 - OCC 165:10-3-10 REQUIRES: 1) THE CHEMICAL DISCLOSURE OF HYDRAULIC

FRACTURING INGREDIENTS FOR ALL WELLS BE REPORTED TO FRACFOCUS USING THE FOLLOWING LINK HTTP://FRACFOCUS.ORG/ WITH NOTICE GIVEN 48 HOURS IN ADVANCE OF FRACTURING TO THE LOCAL OCC DISTRICT OFFICE; AND, 2) PRIOR TO COMMENCEMENT OF FRACTURING OPERATIONS FOR HORIZONTAL WELLS, NOTICE ALSO GIVEN FIVE BUSINESS

DAYS IN ADVANCE TO OFFSET OPERATORS WITH WELLS COMPLETED IN THE SAME

COMMON SOURCE OF SUPPLY WITHIN 1/2 MILE.

INCREASED DENSITY - 653519 7/29/2016 - G60 - W2 10-17N-6W

X604524 MISS 3 WELLS

OKLAHOMA ENERGY ACQUISITIONS, LP

6-15-16

LOCATION EXCEPTION - 653591 7/29/2016 - G60 - (I.O.) W2 10-17N-6W

X604524 MISS

COMPL. INT. NCT 200' FNL, NCT 200' FSL, NCT 330' FWL

OKLAHOMA ENERGY ACQUISITIONS, LP

6-17-16

PENDING CD - 201601584 7/29/2016 - G60 - 10-17N-6W

X604524

X165:10-3-28(C)(2)(B) BULLIS 1706 1A-10MH MAY BE NO CLOSER THAN 200' TO BULLIS 2-10H

REC. 5-23-16 (M. PORTER)

SPACING - 604524 7/29/2016 - G60 - (320)(HOR) W2 10-17N-6W


VAC 53420/62761 MSSLM EST MISS, OTHER

POE TO BHL NLT 660' FB



Oklahoma City, OK (405) 692-7348 Cimsurvey.com

C.A. No. 1780 Expires June 30, 2018

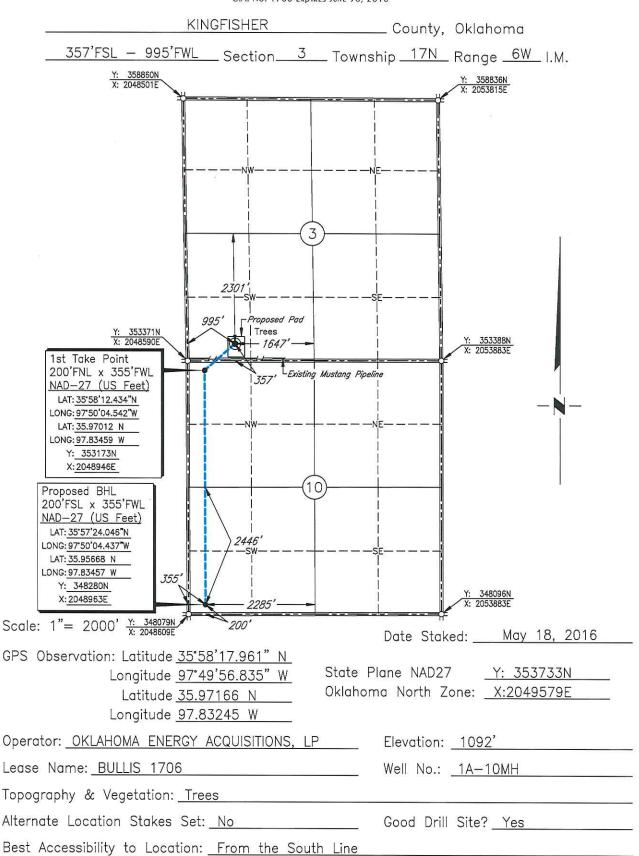

Distance & Direction

from Hwy Jct or Town: From the town of Dover; Thence north along U.S. Hwy. 81

approx. ½ miles; Thence east approx. 4½ miles; Thence south 1 mile to the Southwest

Corner of Section 3.

SURVEYOR'S CERTIFICATE:

I, D. MIKE DOSSEY, Registered Professional Land Surveyor, No. 1431 do hereby certify that the above described well location was carefully staked on the ground as shown and that all ties and distances shown are from existing lines of occupation.

JOB NO.: 1614104A				
DATE: 05/19/16	1	MOVED WELL LOCATION	06/09/16	T.A.W.
DRAWN BY: T.A.W.	NO.	REVISION	DATE	BY

D. MIKE DOSSEY R.P.L.S. # 1431

